(19) World Intellectual Property Organisation International Bureau



(43) International Publication Date 13 January 2005 (13.01.2005)

PCT

(10) International Publication Number WO 2005/003733 A1

(51) International Patent Classification⁷: 1/10, B01L 3/02

G01N 1/20,

- (21) International Application Number: PCT/EP2004/006094
- (22) International Filing Date:

5 June 2004 (05.06.2004)

(25) Filing Language:

German

(26) Publication Language:

German

(30) Priority Data: 103 30 299.9

4 July 2003 (04.07.2003) DE


(71) Applicant (for all designated States except US): MERCK PATENT GMBH [DE/DE]; Frankfurter Strasse 250, 64293 Darmstadt (DE).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): SCHMELZ, Michael [DE/DE]; Im Meerchen 21, 64560 Riedstadt (DE). BRENNER, Günter [DE/DE]; Jahnstrasse 37a, 64347 Griesheim (DE). GREVE, Thomas [DE/DE]; Rodgaustrasse 2c, 64291 Darmstadt (DE). WURZIGER, Hanns [DE/DE]; Greinstrasse 7b, 64291 Darmstadt (DE). ARNDT, Mirco [DE/DE]; Ludwigstrasse 26, 64367 Mühltal (DE).
- (74) Common Representative: MERCK PATENT GMBH; Frankfurter Strasse 250, 64293 Darmstadt (DE).
- (81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

[continued overleaf]

(54) Title: SAMPLING DEVICE FOR A MICROREACTION SYSTEM

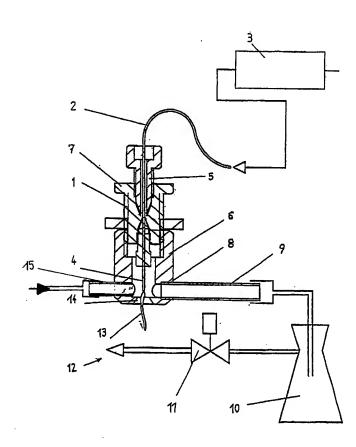

(57) Abstract: A sampling device (1) for a microreaction system (3) has an exit aperture (4) and an
aperture a suction line (9) arranged laterally alongside
the exit aperture (4), where a reduced pressure can be
generated in the suction line (9) for aspiration of the
substances (13) exiting from the exit aperture (4). The
exit aperture (4) is designed in the form of a capillary
and can be positioned relative to the aperture of the
suction line (9). A housing (6) having an outlet aperture (14) for substances (13) exiting from the exit aperture (4) and having a passage aperture (8) for the
suction line (9) is arranged around the exit aperture
(4). The suction line (9) runs into a collecting vessel
(10), which is connected via a magnetic valve (11) to a
vacuum line (12).

KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZW.

(84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.